

ITEM NO: _____



MODEL:
ENCORE® KN53-1000-BR

PRODUCT NAME:
Encore® Wall Mount Pre-Rinse Assembly

OPTIONAL:
 KN53-1000 w/Out Wall Bracket


TECHNICAL/PERFORMANCE SPECIFICATIONS:

Commercial Specification Grade
Gaskets and Seals Rated Commercial Hot 180°F
1/2" NPS Female Inlets
Operating Temperature: 40 - 180°F
Operating Pressure: 15 - 125psi
Handle and Grip: SANIGUARD® treatment



ENGINEERING SPECIFICATION:

Polished Chrome plated brass
Wall mount faucet - 8" adjustable centers
1/4 Turn Compression valves with check valves
Lever handles with SANIGUARD® treatment
S/S flex hose with santoprene reinforced hose
Stainless steel strain relief - patented
O-ring seals - patented
Standard full spray pattern
1.2 GPM spray face included
Hold open ring and hose hook included

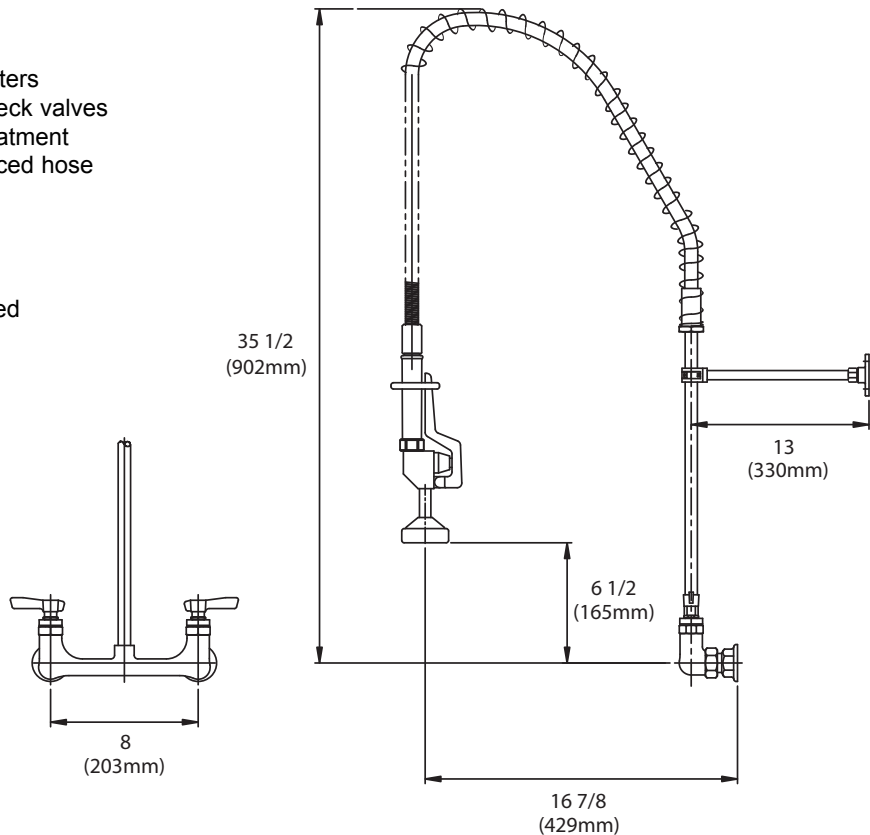

COMPLIES WITH:

ANSI A112.18.1M
CSA B125
NSF 61 / 9
ASTM F2324



MODEL: ENCORE® KN53-1000-BR

OPTIONS:

Mounting Kits

- | | |
|------------------------------------|--|
| <input type="checkbox"/> KN40-1000 | Mounting Hardware with 1/2" NPTF x 1/2" Sweat EII |
| <input type="checkbox"/> KN40-2000 | Mounting Hardware with 1/2" NPTF x 1/2" NPTF Close EII |
| <input type="checkbox"/> KN40-2010 | Mounting Hardware with 1/2" NPTM x 1/2" Sweat EII |

Handles

- | | |
|-------------------------------------|--------------------------------|
| <input type="checkbox"/> K50-0001 | 4" Wrist Blade Handles |
| <input type="checkbox"/> K50-0001-6 | 6" Wrist Blade Handles |
| <input type="checkbox"/> K50-X011 | Cross Handle Replacement Kit |
| <input type="checkbox"/> K50-X117 | Chrome Plated Designer Handles |

Valves

- | | |
|--|--|
| <input type="checkbox"/> KN50-Y006-CCV | Cold 1/4 Turn Ceramic Valve with Inline Check Valves |
| <input type="checkbox"/> KN50-Y007-CCV | Hot 1/4 Turn Ceramic Valve with Inline Check Valves |

Add-on faucets

- | | |
|------------------------------------|-----------------------------|
| <input type="checkbox"/> KN55-7006 | With 6"(152mm) Swing Spout |
| <input type="checkbox"/> KN55-7008 | With 8"(203mm) Swing Spout |
| <input type="checkbox"/> KN55-7010 | With 10"(254mm) Swing Spout |
| <input type="checkbox"/> KN55-7012 | With 12"(305mm) Swing Spout |
| <input type="checkbox"/> KN55-7014 | With 14"(356mm) Swing Spout |
| <input type="checkbox"/> KN55-7016 | With 16"(406mm) Swing Spout |

Vacuum breakers

- | | |
|-------------------------------------|--|
| <input type="checkbox"/> K50-X139 | Top of Riser Atmospheric Vacuum Breaker |
| <input type="checkbox"/> K50-X139-B | Bottom of Riser Atmospheric Vacuum Breaker |
| <input type="checkbox"/> K50-X196 | In-Line Hose Application |